

UltraCOMP™ Engineered Thermoplastics

Tube & Sleeve Stock Availability

No. 5263B1-USA

Availability

UltraCOMP™ is available in injection molded geometries, custom machined geometries and tube stock sizes ranging up to 12 inches OD in lengths up to 4 inches and cross-sections up to 1/2".

Four UltraCOMP™ Formulations

UltraCOMP™ is available in four compound formulations:

- UltraCOMP™ HTP (4685) Virgin
- UltraCOMP™ CF (4737) 30% Carbon fiber filled
- UltraCOMP™ GF (4686) 30% Glass filled
- UltraCOMP™ CGT (4738) 10%Carbon/10% Graphite/10% PTFE filled

See Parker EPS Bulletin 5264 for more information on UltraCOMP™ materials.


Current Sizes Available:

For tube/sleeve sizes not listed, consult factory. Non-recurring set-up charge (NRSUC) may apply.



Tube/Sleeve Part Number	Inside Dia (In)	Outside Dia (In)	Length (In)
4685BL005001500-4000	1/2	1 1/2	4
4685BL008751375-4000	7/8	1 3/8	4
4685BL075001250-4000	3/4	1 1/4	4
4685BL075001500-4000	3/4	1 1/2	4
4685BL075001625-4000	3/4	1 5/8	4
4685BL100001250-4000	1	1 1/4	4
4685BL100001500-4000	1	1 1/2	4
4685BL100001625-4000	1	1 5/8	4
4685BL100001750-4000	1	1 3/4	4
4685BL100001750-4000	1	1 3/4	4
4685BL100002000-4000	1	2	4
4685BL125001500-4000	1 1/4	1 1/2	4
4685BL125001625-4000	1 1/4	1 5/8	4
4685BL125001750-4000	1 1/4	1 3/4	4
4685BL125002000-4000	1 1/4	2	4
4685BL137501750-4000	1 3/8	1 3/4	4
4685BL137502000-4000	1 3/8	2	4
4685BL150002000-4000	1 1/2	2	4
4685BL150002500-4000	1 1/2	2 1/2	4
4685BL175002000-4000	1 3/4	2	4
4685BL175002500-4000	1 3/4	2 1/2	4
4685BL175002750-4000	1 3/4	2 3/4	4
4685BL200002500-4000	2	2 1/2	4
4685BL225002750-4000	2 1/4	2 3/4	4
4685BL250003000-4000	2 1/2	3	4
4685BL250003000-4000	2 1/2	3 1/2	4
4685BL275003250-4000	2 3/4	3 1/4	4
4685BL300003500-4000	3	3 1/2	4
4685BL350004000-4000	3 1/2	4	4
4685BL375004125-4000	3 3/4	4 1/8	4
4685BL400004500-4000	4	4 1/2	4
4685BL425004750-4000	4 1/4	4 3/4	4
4685BL475005250-4000	4 3/4	5 1/4	4
4685BL500005500-4000	5	5 1/2	4

Generating Part Numbers for UltraCOMP™ Tubes/Sleeves

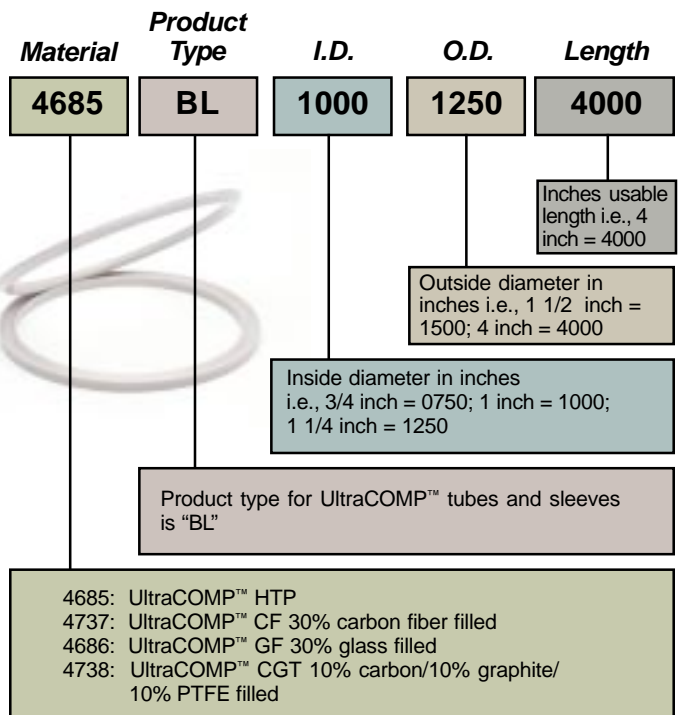

**NOTE:** Buyer is solely responsible for testing any product which it manufactures using materials supplied by Seller, and for ensuring the suitability of any such product for the intended application, and that all performance, safety, and warning requirements of that application are met. Seller's warranty shall extend only to defects in the materials themselves, and not to any damages not due directly to any such defect. Notwithstanding the foregoing, there are no warranties whatsoever on any products which are not of Seller's design or specification.

Copyright © 2001, Parker Hannifin Corporation, Cleveland, OH. All Rights Reserved.