


## **ANSI-FLEX FLANGE GASKET**

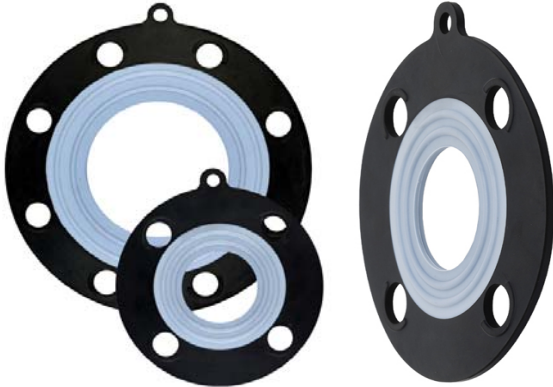

An Ansi-Flex™150# Ansi Flange Gasket's contact surface is a layer of PTFE unitized to an EPDM rubber inner core. This totally bonded construction provides a PTFE gasket with the mechanical characteristics, including memory, of an elastomer gasket with exceptional steam resistance. An Ansi-Flex™ 150# Ansi Flange Gasket is ideal for applications, such as PVC piping and glass lining piping, where low seating stress is required. The Ansi-Flex™150# Ansi Flange Gasket has superior and extended service life over standard flange gaskets. Achieve higher performance under SIP/CIP conditions.

### **AVAILABLE SIZES:**

1/2" - 12"

### **Also Available in 300# Ansi-Flex Meets Stringent Standards**

- U.S. Pharmacopeia Class VI Certification
- Cytotoxicity Criteria
- USDA and 3-A Sanitary Standards
- Current Good Manufacturing Practices (CGMP)
- ASME-BPE Standards

### **ALSO AVAILABLE:**

Ansi-Flange in 1/8" thick Tuf-Steel material