

# Section C: Oriented Wires

*U.S. Customary  
[SI Metric]*



**PRODUCT**

**PAGE**

ELASTOMET® (Oriented Array of Wires in Silicone Rubber) . . . . .C1 - C5

ELASTOFOAM® (Oriented Array of Wires in Silicone Sponge) . . . . .C6 - C8



# Elastomet®

## ORIENTED WIRES IN SOLID SILICONE RUBBER

U.S. Customary  
[SI Metric]

### GENERAL DESCRIPTION

TECKNIT ELASTOMET is a patented composite gasket material consisting of scores of individual fine wires embedded and bonded in a solid silicone or fluorosilicone elastomer.


### FEATURES

- Effective broadband shielding and environmental sealing at moderate closure forces.
- Low contact resistance.
- Electrochemically compatible with most metals and alloys.
- Wide operating temperature range.
- Available in sheets, strips, and stamped gaskets.
- All wires oriented perpendicular to mating surfaces.
- Convuluted wires acting like individual springs permit superior gasket rebound.
- Superior moisture resistance: absence of connections between wires prevents moisture channeling or "wicking."
- In accordance with DESC drawing No. 90046.
- Meets salt spray test per ASTM B117-03.

### APPLICATION INFORMATION


ELASTOMET is recommended for use in military, industrial, and commercial applications requiring EMI suppression, grounding, or static discharge in conjunction with the following design criteria; environmental sealing, medium to high closure forces, and absence of loose wire fragments which could cause electrical or mechanical damage to equipment. For applications with severe joint unevenness, low closure forces, and where greater compressibility is required, use ELASTO-FOAM® shielding material. Refer to ELASTOFOAM page for information.

### COMPRESSION/DEFLECTION CURVE

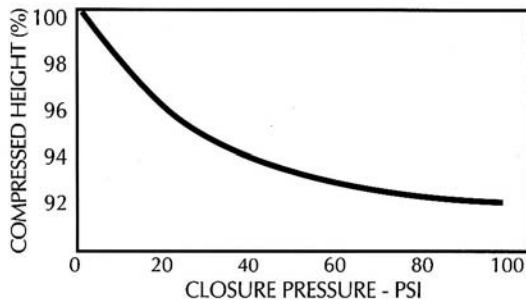

### EMI SHIELDING PERFORMANCE\*

TECKNIT ELASTOMET Shielding Effectiveness has been tested in accordance with TECKNIT Test Method TSETS-01, based upon modified MIL-STD- 285. Typical values are given below.

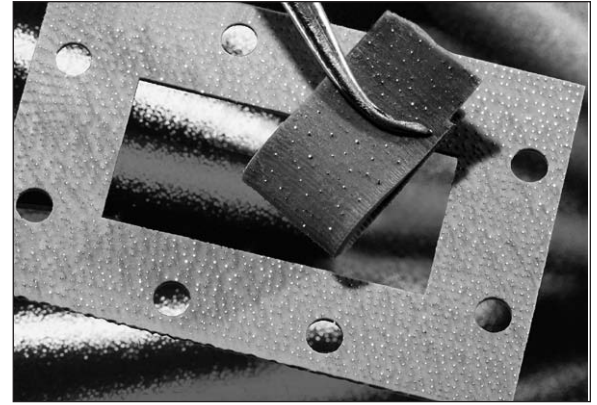

MATERIALS	H-FIELD	E-FIELD	PLANE WAVE	
	100 kHz	10 MHz	1 GHz	10 GHz
	dB	dB	dB	dB
Monel	75	130+	110	100
Phosphor Bronze	80	130+	115	100

### SPECIFICATIONS

#### MATERIAL DESCRIPTION

##### Wire

- **Standard:** Monel, .0045 in. [0.114 mm] dia., per QQ-N-281.
- **Special:** Aluminum Alloy 5056, .005 in. [0.127 mm] dia., per SAE-AMS-4182 (except max. tensile strength is 75,000 psi). Phosphor Bronze, .0045 in. [0.114 mm] dia. per ASTM B 105, Alloy 30 (CDA C50700).

##### Elastomer

- **Standard:** Solid Silicone Rubber per ZZ-R-765, Class 3A, Grade 30. (30 + 5, - 10 Shore A Durometer) (AA-59588).
- **Color:** Gray.
- **Special:** Fluorosilicone\* per MIL-R-25988B Class 1 Grade 40, Type II (SAE-AMS-R-25988).
- **Color:** Light Blue.

**Wire Population:** 960/in.<sup>2</sup> [150 cm<sup>2</sup>] ±15%.\*\*

#### PERFORMANCE CHARACTERISTICS

##### Temperature Range:

-65°F to 392°F [-55°C to 200°C].

**Recommended Closure Force:** 50 psi to 100 psi.

**Recommended Compression:** 5% min.

\*Fluorosilicone available only with phosphor bronze wire.

\*\* Minimum of 4 wires required in cross-section for effective shielding.



**STANDARD SHEETS (Table 1.)**

Standard ELASTOMET sheets are Monel wire in solid silicone, 3 in. [76 mm], 6 in. [152 mm], and 9 in. [229 mm] wide by 3 ft. [0.9 m] long. Custom widths will be formed by bonding together sheets.


**Table 1.** Standard Sheets

Height in. [mm]	Width in. [mm]	Part No. Monel	Height in. [mm]	Width in. [mm]	Part No. Monel
				3 [76]	82-55312
**	3 [76]	82-55303	.125[3.18]	6 [152]	82-55612
.030[0.76]	6 [152]	82-55603		9 [229]	82-55912
	3 [76]	82-55304		3 [76]	82-55315
.045[1.14]	6 [152]	82-55604	.156 [3.96]	6 [152]	82-55615
**	9 [229]	82-55904		9 [229]	82-55915
	3 [76]	82-55306		3 [76]	82-55318
.062[1.57]	6 [152]	82-55606	.187 [4.75]	6 [152]	82-55618
	9 [229]	82-55906		9 [229]	82-55918
	3 [76]	82-55309		3 [76]	82-55325
.093[2.36]	6 [152]	82-55609	.250 [6.35]	6 [152]	82-55625
	9 [229]	82-55909		9 [229]	82-55925

Change third digit of part number from -5 to -4 to specify "custom ALUMINUM ELASTOMET".  
 Change the third digit of part number -5 to -B to specify "custom PHOSPHOR BRONZE ELASTOMET".  
 Change third digit of part number -5 to -F to specify "custom PHOSPHOR BRONZE FLUOROSILICONE ELASTOMET".  
 Change fourth digit from -5 to -6 to specify "PRESSURE SENSITIVE ADHESIVE BACKING".  
 \*\* Not available with Phosphor Bronze Wire or Fluorosilicone Elastomer.

**STANDARD ELASTOMET STRIPS (Table 2.)**

Standard strips are nominally 11 ft. [3.4 m] in length. Bonded continuous lengths are available on special orders. Custom strips are available with aluminum and with Phosphor Bronze wires. Pressure sensitive adhesive backing is available for Monel, aluminum, and phosphor bronze strips. Contact TECKNIT for thicknesses greater than .500 in. [12.70 mm].

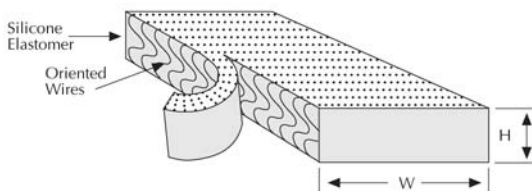

**Figure 1.**

**Table 2 - Standard Elastomer Strips**

Width in. [mm]	Height in. [mm]	Part No. Monel	Width in. [mm]	Height in. [mm]	Part No. Monel
.093 [2.36]	** .030 [0.76]	82-12651	.500 [12.70]	** .030 [0.76]	82-12665
.093 [2.36]	.062 [1.57]	82-12628	.500 [12.70]	.062 [1.57]	82-12281
.093 [2.36]	.093 [2.36]	82-12021	.500 [12.70]	.093 [2.36]	82-12286
.093 [2.36]	.125 [3.18]	82-12026	.500 [12.70]	.125 [3.18]	82-12291
.093 [2.36]	.156 [3.96]	82-12629	.500 [12.70]	.156 [3.96]	82-12296
-	-	-	.500 [12.70]	.187 [4.75]	82-12301
.125 [3.18]	** .030 [0.76]	82-12655	.500 [12.70]	.250 [6.35]	82-12306
.125 [3.18]	.062 [1.57]	82-12041	-	-	-
.125 [3.18]	.093 [2.36]	82-12046	-	-	-
.125 [3.18]	.125 [3.18]	82-12051	-	-	-
.125 [3.18]	.156 [3.96]	82-12056	.625 [15.88]	** .030 [0.76]	82-12667
.125 [3.18]	.187 [4.75]	82-12061	.625 [15.88]	.062 [1.57]	82-12336
-	-	-	.625 [15.88]	.093 [2.36]	82-12341
.187 [4.75]	** .030 [0.76]	82-12657	.625 [15.88]	.125 [3.18]	82-12346
.187 [4.75]	.062 [1.57]	82-12086	.625 [15.88]	.156 [3.96]	82-12351
.187 [4.75]	.093 [2.36]	82-12091	.625 [15.88]	.187 [4.75]	82-12356
.187 [4.75]	.125 [3.18]	82-12096	.625 [15.88]	.250 [6.35]	82-12361
.187 [4.75]	.156 [3.96]	82-12101	.625 [15.88]	.375 [9.53]	82-12371
.187 [4.75]	.187 [4.75]	82-12106	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
.250 [6.35]	** .030 [0.76]	82-12659	.750 [19.05]	** .030 [0.76]	82-12669
.250 [6.35]	.062 [1.57]	82-12126	.750 [19.05]	.062 [1.57]	82-12391
.250 [6.35]	.093 [2.36]	82-12131	.750 [19.05]	.093 [2.36]	82-12396
.250 [6.35]	.125 [3.18]	82-12136	.750 [19.05]	.125 [3.18]	82-12401
.250 [6.35]	.156 [3.96]	82-12141	.750 [19.05]	.156 [3.96]	82-12406
.250 [6.35]	.187 [4.75]	82-12146	.750 [19.05]	.187 [4.75]	82-12411
.250 [6.35]	.250 [6.35]	82-12151	.750 [19.05]	.250 [6.35]	82-12416
-	-	-	.750 [19.05]	.375 [9.53]	82-12426
-	-	-	.750 [19.05]	.500 [12.70]	82-12431
-	-	-	-	-	-
.375 [9.53]	** .030 [0.76]	82-12663	1.000 [25.40]	** .030[0.76]	82-12671
.375 [9.53]	.062 [1.57]	82-12226	1.000 [25.40]	.062 [1.57]	82-12446
.375 [9.53]	.093 [2.36]	82-12231	1.000 [25.40]	.093 [2.36]	82-12451
.375 [9.53]	.125 [3.18]	82-12236	1.000 [25.40]	.125 [3.18]	82-12456
.375 [9.53]	.156 [3.96]	82-12241	1.000 [25.40]	.156 [3.96]	82-12461
.375 [9.53]	.187 [4.75]	82-12246	1.000 [25.40]	.187 [4.75]	82-12466
.375 [9.53]	.250 [6.35]	82-12251	1.000 [25.40]	.250 [6.35]	82-12471
.375 [9.53]	.375 [9.53]	82-12261	1.000 [25.40]	.375 [9.53]	82-12481
-	-	-	1.000 [25.40]	.500 [12.70]	82-12486

Change third digit of part number from -1 to -2 to specify "custom ALUMINUM ELASTOMET".  
 Change the third digit of part number -1 to -B to specify "custom PHOSPHOR BRONZE ELASTOMET".  
 Change third digit of part number -1 to -F to specify "custom PHOSPHOR BRONZE FLUOROSILICONE ELASTOMET".  
 Change fourth digit from -2 to -3 to specify "PRESSURE SENSITIVE ADHESIVE BACKING".  
 Use of the pressure-sensitive adhesive is restricted to strips and gaskets having a minimum cross-section width of .250 in. [6.35 mm].  
 \*\* Not available with Phosphor Bronze Wire or Fluorosilicone Elastomer.

# Elastomet, Cont.

U.S. Customary  
[SI Metric]

## TWIN ELASTOMET STRIPS (Table 3.)

TWIN ELASTOMET is a variation of the standard ELASTOMET strip in that the oriented wires occupy only a portion of the total strip width. See Figure below.

TWIN ELASTOMET STRIPS are available standard with Monel or custom with phosphor bronze or aluminum wires. Minimum custom width (W) is .375 in. [9.5 mm]. Width and height tolerances are the same as those specified for ELASTOMET strips. Contact TECKNIT offices for minimum order requirements for TWIN ELASTOMET.

Figure 2.

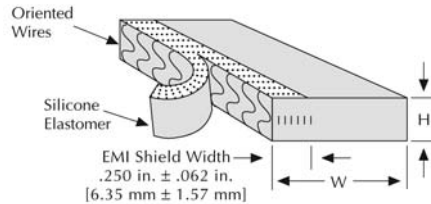


Table 3.

STANDARD TWIN ELASTOMET STRIPS		
W in. [mm]	H in. [mm]	Part Number *
.625 [15.88]	.062 [1.57]	82-12972
.625 [15.88]	.125 [3.18]	82-12911
.625 [15.88]	.187 [4.75]	82-12936
.625 [15.88]	.250 [6.35]	82-12956
.750 [19.05]	.062 [1.57]	82-12973
.750 [19.05]	.125 [3.18]	82-12916
.750 [19.05]	.187 [4.75]	82-12941
.750 [19.05]	.250 [6.35]	82-12961
1.000 [25.40]	.062 [1.57]	82-12974
1.000 [25.40]	.125 [3.18]	82-12921
1.000 [25.40]	.187 [4.75]	82-12946
1.000 [25.40]	.250 [6.35]	82-12966

\* Change fourth digit from 2 to 3 to specify pressure sensitive adhesive backing.

## PRESSURE-SENSITIVE ADHESIVE

ELASTOMET can be furnished with an acrylic pressure-sensitive adhesive applied to the mounting surface. Use of the pressure-sensitive adhesive is restricted to strips and gaskets having a minimum cross-section width of .250 in. [6.35 mm]. Shelf life is one year from date of receipt when stored at or below room temperature (23°C).

Table 4.

SHEET & STRIP CROSS-SECTION TOLERANCES		
Dimension in. [mm]	Height in. [mm]	Width in. [mm]
.030 to .092 [.76 to 2.36]	+ .010 - .005 [+ .25 - .13]	N/A -
.093 to .250 [2.36 to 6.36]	± .010 [± .25]	± .016 [± .40]
.251 to .750 [6.37 to 19.05]	± .010 [± .25]	± .031 [± .79]
over .750 [over 19.05]	± .015 [± .38]	± .047 [± 1.19]
3 [76]	N/A	± .13 [± 3.2]
6 [152]	N/A	± .25 [± 6.4]
9 [229]	N/A	± .38 [± 9.7]
36 [91.4]	N/A	± 1.00 [± 2.54]

## SPECIFYING DIE-CUT GASKETS

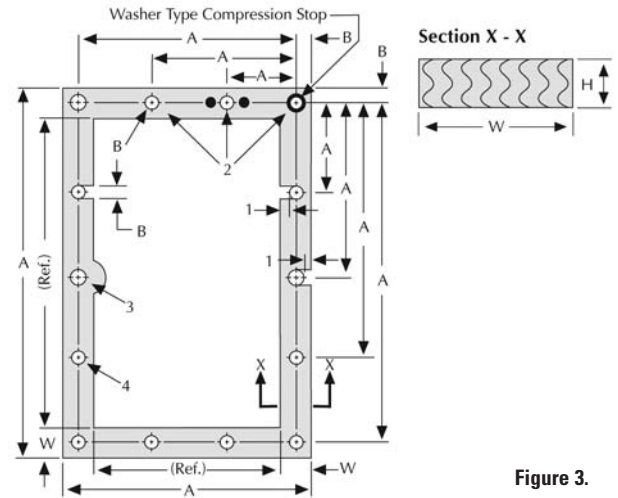


Figure 3.

## FABRICATED GASKETS TOLERANCES

The following tolerances and notes refer to the dimensions illustrated in Figure 3.

### CUSTOM FABRICATED GASKET TOLERANCES

Symbol	Dimension in. [mm]	Tolerances in. [mm]
A	up to 6 [152]	± .016 [± .40]
	Each Additional 1 in. [25.4]	± .003 [± .08]
B	1 in. [up to 25.4]	± .016 [± .40]
	1 in. [over 25.4]	± .031 [± .79]
W, H		See Tolerance For Strips

## ORDERING INFORMATION

For standard sheets and strips, specify TECKNIT Part Number and quantity required. For nonstandard items contact your TECKNIT area representative or factory location.

### NOTES:

1. Bolt holes closer to the gasket edge than the gasket thickness must be u-shaped slots, or see note 3.
2. Distance from compression stop to edge of sealing gasket must not be less than gasket thickness.
3. Bolt holes closer to gasket edge than gasket thickness can be with edge protrusion.
4. Hole diameter must not be less than gasket thickness, nor less than .093 inches diameter.

## Elasto-Bond® Adhesive

### GENERAL DESCRIPTION

ELASTO-BOND is a ready to use one component non-conductive silicone rubber based adhesive sealant. The adhesive system is an RTV that cures by reacting with moisture in the air. The compound is ready to use and does not require additional preparation or mixing.

### APPLICATION INFORMATION

ELASTO-BOND adhesive sealant is recommended wherever a flexible bond is required between a metal surface and an ELASTOMET® or ELASTO-FOAM® gasket. To ensure optimum performance the bond thickness should not exceed .005 to .010 in. Depending on the degree of adhesion required, gaskets can be spot bonded or continuously bonded.

### SURFACE PREPARATION

Metal surfaces should be lightly abraded with Scotch Brite or an equivalent, degreased with 1,1,1 trichloroethane and then wiped with acetone or MEK before applying primer. Gaskets should be cleaned with isopropanol before applying adhesive.

## SPECIFICATIONS

### MATERIAL DESCRIPTION

**Part Number:** 72-00177

**Resin:** Silicone RTV

**Uncured Consistency:** Nonslumping Paste

**Cured Condition:** Flexible

### PERFORMANCE CHARACTERISTICS

**Temperature Range:** -76°F to 399°F  
[-60°C to 204°C]

**Peel Strength (min.):** ASTM D-1002 60 psi  
[.414 MPa]

**Color:** Grey

**Shelf Life (unopened container):** 6 mos. min.  
(when stored at 21°C)

**Recommended Cure:** 72 hours at room temperature and 50% RH

**Full Cure:** 7 Days


**Clean Up Solvent:** Denatured Alcohol

**Packaging\*\*:** Tube 1.5 oz. [43 g]

\*\*Primer supplied in separate vial.


# Elastomet, Cont.

U.S. Customary  
[SI Metric]

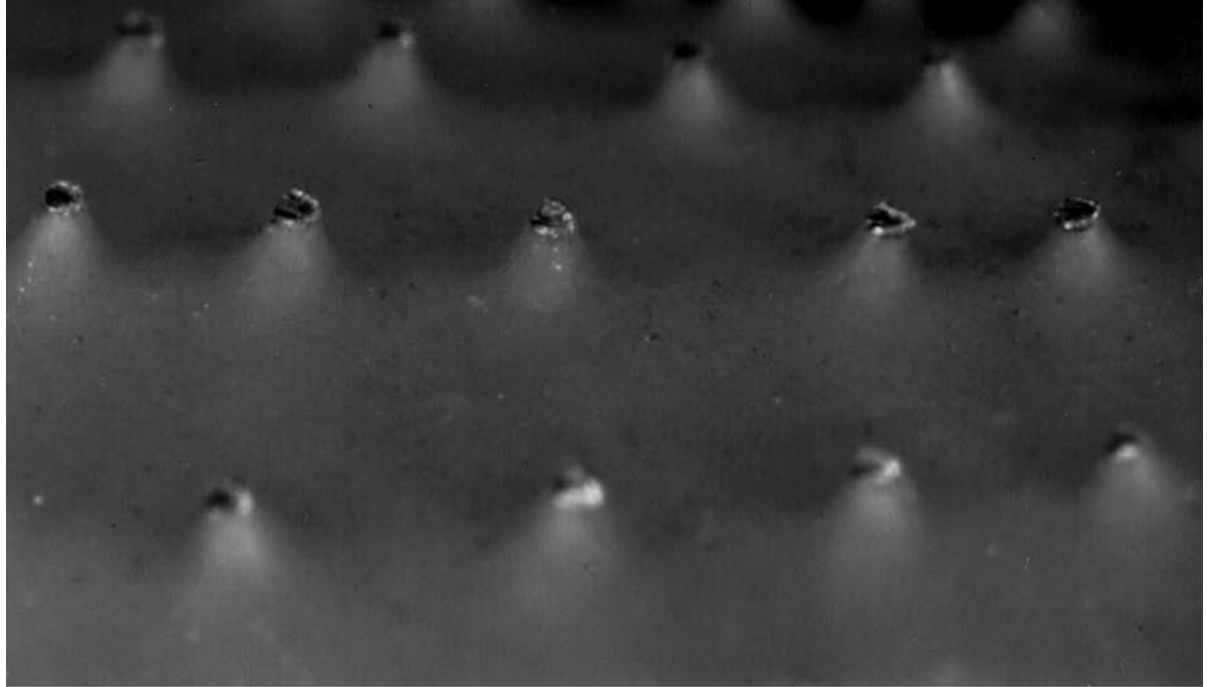


**TECKNIT ELASTOMET®**

Tecknit Elastomer is a patented composite gasket material consisting of scores of individual fine wires embedded in and bonded in a solid silicone elastomer.

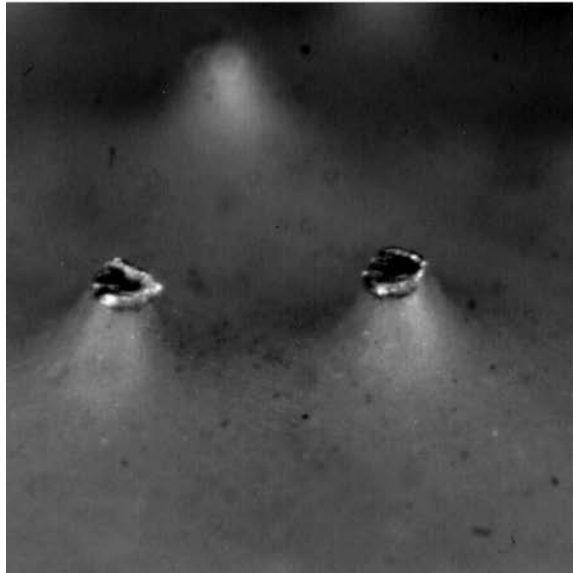

**TECKNIT ELASTOMET SAMPLE**

Tecknit Elastomet's patented chemical bonding wire loss.

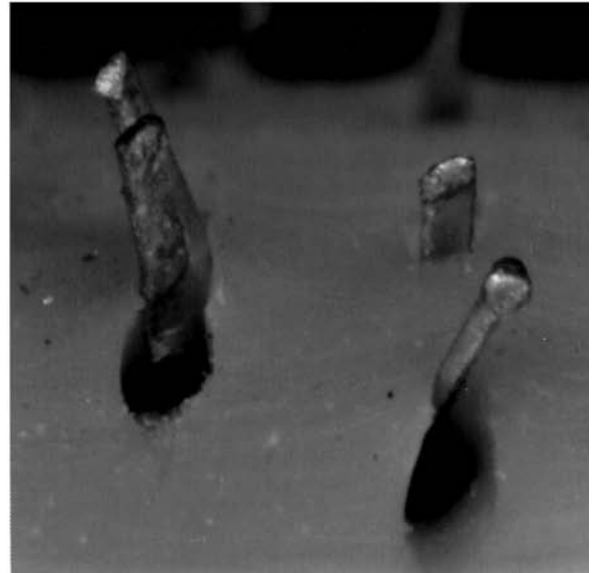

**COMPETITIVE SAMPLE**



# Elastofoam®

## ORIENTED WIRES IN SOFT SILICONE SPONGE

### GENERAL DESCRIPTION

ELASTOFOAM is a patented, composite EMI shielding and environmental sealing gasket material consisting of scores of individual fine wires embedded and bonded in a soft closed cell silicone sponge elastomer. The material is characterized by outstanding compressibility, recovery and wire retention.


### FEATURES

- All wires oriented perpendicular to mating surfaces.
- Effective broadband shielding and environmental sealing at low closure forces.
- Convoluted wires acting like individual springs permit superior gasket rebound.
- Wires chemically bonded to elastomer-will not fall out.
- Low compression set.
- Accommodates a broad range of surface irregularities.
- Good moisture resistance: closed cell sponge plus absence of connections between wires prevents moisture channeling or "wicking."
- Compatible with most metals and alloys.
- Wide operating temperature range.
- Meets salt spray test per ASTM B117-03.
- In Accordance with DESC drawing No. 90046.

### APPLICATION INFORMATION

ELASTOFOAM is recommended for use in military, industrial, and commercial application requiring EMI suppression, grounding, or static discharge in conjunction with the following design criteria: low closure forces, severe joint unevenness, environmental sealing, repeated opening and closing of access doors and panels, and absence of wire fragments which could cause electrical or mechanical damage to equipment. For applications requiring medium to high closure forces, use ELASTOMET. Refer to the ELASTOMET page.

### COMPRESSION/DEFLECTION CURVE

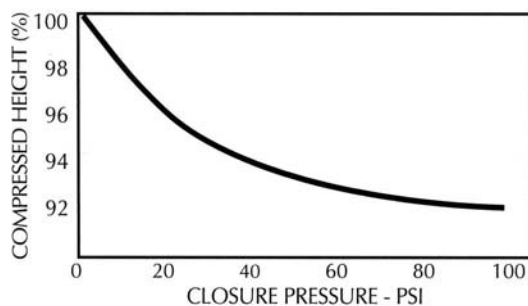

### SPECIFICATION

#### MATERIAL DESCRIPTION

##### Wire

- **Standard:**
- **Monel**, .0020 in. [0.05 mm] dia. per QQ-N-281.
- **Special:**
- **Aluminum alloy**, 5056, .0050 in. [0.127mm] per SAE-AMS-4182 (except max. tensile strength is 75,000 psi).
- **Phosphor Bronze**, .0020 in. [0.05 mm] dia. per ASTM B-105, Alloy 30 (C50700)

##### Wire Population

**650/in.<sup>2</sup>** [100/cm<sup>2</sup>] ± 15%

##### Elastomer

- **Closed cell silicone sponge:** per SAE-AMS-3195, except density is .028 lb./in.<sup>3</sup> [0.78 g/cm<sup>3</sup>]
- **Color:** Gray

#### PERFORMANCE CHARACTERISTICS

**Temperature Range:** -65°F to 338°F [-55°C to 170°C].

**Recommended Closure Force:** 10 PSI to 40 PSI

**Recommended Compression:** 10% min.


TECKNIT

# Elastofoam, Cont.

U.S. Customary  
[SI Metric]

## STANDARD STRIPS

Strips are available in standard widths from .125 to 1.000 in. [3.18 to 25.40 mm]. Standard strip length is 11 ft. [3.4 m]. Bonded continuous lengths are available on special order.

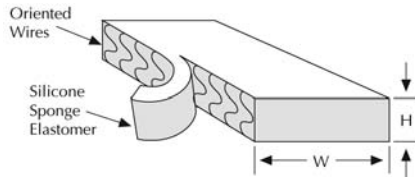

## TWIN ELASTOFOAM (Monel Wire Only)

TWIN ELASTOFOAM is a variation of the standard ELASTOFOAM Strip in that the oriented wires occupy only a portion of the total strip width. See Figure 1.

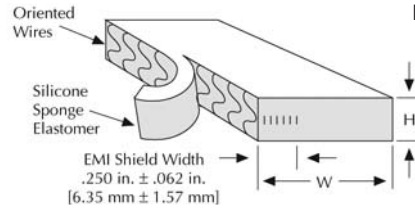


Figure 1.

RECOMMENDED GROOVE DEPTH in. [mm]	
1	.047 [1.19] + 0 - .003 [+ 0 - 0.08]
2	.075 [1.91] + 0 - .003 [+ 0 - 0.08]
3	.099 [2.51] ± .004 [± 0.10]
4	.125 [3.18] ± .005 [± 0.13]
5	.150 [3.81] ± .006 [± 0.15]
6	.200 [5.08] ± .006 [± 0.15]
7	.300 [7.62] ± .006 [± 0.15]
8	.400 [10.16] ± .006 [± 0.15]

## EMI SHIELDING PERFORMANCE

TECKNIT ELASTOFOAM Shielding Effectiveness has been tested in accordance with TECKNIT Test Method TSETS-01 and based upon modified MIL-STD-285. Typical values are given below.

MATERIALS	H-FIELD	E-FIELD	PLANE WAVE	
	100 kHz	10 MHz	1 GHz	10 GHz
	dB	dB	dB	dB
Monel	60	130	105	95

STRIP CROSS-SECTIONAL TOLERANCES		
DIMENSION	HEIGHT (H)	WIDTH (W)
in. [mm]	in. [mm]	in. [mm]
.062 to .092 [1.57 to 2.34]	+0.010 [.25], -.005 [.13]	±.015 [.38]
.093 to .125 [3.26 to 3.18]	±.010 [.25]	±.015 [.38]
.126 to .250 [3.2 to 6.35]	±.010 [.25]	±.031 [.787]
.251 to .750 [6.37 to 19.05]	±.010 [.25]	±.047 [1.19]
.751 to 1.00 [19.08 to 25.4]	±.015 [.381]	±.062 [1.57]


## STANDARD STRIPS

W in. [mm]	H in. [mm]	Rec. Groove Depth	TECKNIT Part No.**	W in. [mm]	H in. [mm]	Rec. Groove Depth	TECKNIT Part No.**
.125 [3.18]	.062 [1.57]	1	88-12653	.500 [12.70]	.187 [4.75]	5	88-12302
.125 [3.18]	.093 [2.36]	2	88-12047	.500 [12.70]	.250 [6.35]	6	88-12307
.125 [3.18]	.125 [3.18]	3	88-12052	.500 [12.70]	.375 [9.52]	7	88-12317
.125 [3.18]	.156 [3.96]	4	88-12057	.500 [12.70]	.500 [12.70]	8	88-12322
.125 [3.18]	.187 [4.75]	5	88-12062	.625 [15.88]	.062 [1.57]	1	88-12337
.187 [4.75]	.062 [1.57]	1	88-12087	.625 [15.88]	.093 [2.36]	2	88-12342
.187 [4.75]	.093 [2.36]	2	88-12092	.625 [15.88]	.125 [3.18]	3	88-12347
.187 [4.75]	.125 [3.18]	3	88-12097	.625 [15.88]	.156 [3.96]	4	88-12352
.187 [4.75]	.156 [3.96]	4	88-12102	.625 [15.88]	.187 [4.75]	5	88-12357
.187 [4.75]	.187 [4.75]	5	88-12107	.625 [15.88]	.250 [6.35]	6	88-12362
.187 [4.75]	.250 [6.35]	6	88-12112	.625 [15.88]	.375 [9.52]	7	88-12372
.250 [6.35]	.062 [1.57]	1	88-12127	.750 [19.05]	.062 [1.57]	1	88-12392
.250 [6.35]	.093 [2.36]	2	88-12132	.750 [19.05]	.093 [2.36]	2	88-12397
.250 [6.35]	.125 [3.18]	3	88-12137	.750 [19.05]	.125 [3.18]	3	88-12402
.250 [6.35]	.156 [3.96]	4	88-12142	.750 [19.05]	.156 [3.96]	4	88-12407
.250 [6.35]	.187 [4.75]	5	88-12147	.750 [19.05]	.187 [4.75]	5	88-12412
.250 [6.35]	.250 [6.35]	6	88-12152	.750 [19.05]	.250 [6.35]	6	88-12417
.375 [9.52]	.062 [1.57]	1	88-12227	.750 [19.05]	.375 [9.52]	7	88-12427
.375 [9.52]	.093 [2.36]	2	88-12232	.750 [19.05]	.500 [12.70]	8	88-12432
.375 [9.52]	.125 [3.18]	3	88-12237	1.000 [25.40]	.062 [1.57]	1	88-12447
.375 [9.52]	.156 [3.96]	4	88-12242	1.000 [25.40]	.093 [2.36]	2	88-12452
.375 [9.52]	.187 [4.75]	5	88-12247	1.000 [25.40]	.125 [3.18]	3	88-12457
.375 [9.52]	.250 [6.35]	6	88-12252	1.000 [25.40]	.156 [3.96]	4	88-12462
.375 [9.52]	.375 [9.52]	7	88-12262	1.000 [25.40]	.187 [4.75]	5	88-12467
.500 [12.70]	.062 [1.57]	1	88-12282	1.000 [25.40]	.250 [6.35]	6	88-12472
.500 [12.70]	.093 [2.36]	2	88-12287	1.000 [25.40]	.375 [9.52]	7	88-12482
.500 [12.70]	.125 [3.18]	3	88-12292	1.000 [25.40]	.500 [12.70]	8	88-12487
.500 [12.70]	.156 [3.96]	4	88-12297				

NOTES: \*\* 1. To specify ALUMINUM ELASTOFOAM STRIP, change the third digit of the part number from -1 to -2. Contact factory for availability.  
 2. To specify TWIN ELASTOFOAM STRIP, change the THIRD digit of the part number from -1 to -3. Minimum available width is .375 in. [9.53 mm]  
 3. To specify PHOSPHOR BRONZE ELASTOFOAM STRIP, change the THIRD digit of the part number from -1 to -7. Contact factory for availability.  
 4. To specify PRESSURE SENSITIVE ADHESIVE BACKING, change the FOURTH digit from -2 to -3. Use of the pressure-sensitive adhesive is restricted to strips and gaskets having minimum cross-section width of .250 in. [6.35 mm].



**STANDARD DIE-CUT GASKETS**

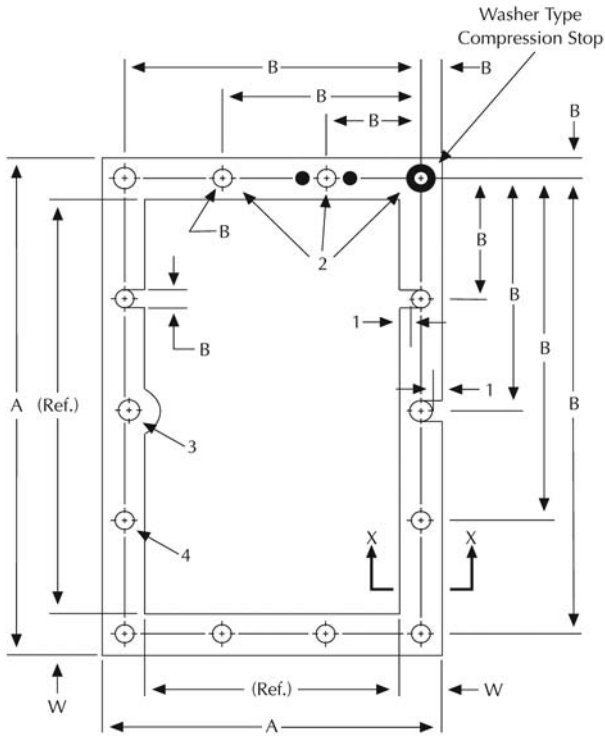

Section X - X




Figure 2.

**FABRICATED GASKET TOLERANCES**

The following tolerances and notes refer to the dimensions illustrated in Figure 2.

CUSTOM FABRICATED GASKET TOLERANCES		
SYMBOL	DIMENSION	TOLERANCES
	in. [mm]	in. [mm]
<b>A</b>	0 - 6 in. [0 - 152]	± .020 [.508]
	Each additional 1 in. [25.4]	± .007 [.178]
<b>B</b>	0 - .250 in. [0 - 6.3]	± .020 [.508]
	.251 - 6 in. [6.4 - 152]	± .031 [.787]
	Each additional 1 in. [25.4]	± .005 [.127]
<b>H,W</b>		See tolerances for strips

Notes:

1. Bolt holes closer to gasket edge than gasket thickness must be u-shaped slots, or see note 3.
2. Distance from compression stop to edge of sealing gasket must not be less than gasket thickness.
3. Bolt holes closer to gasket edge than gasket thickness can be with edge protrusion.
4. Hole diameter must not be less than gasket thickness, not less than .125 in diameter.

**ORDERING INFORMATION**

To order standard parts specify the TECKNIT Part Number and the quantity in feet. For assistance with nonstandard strips or assembled gaskets, contact your nearest TECKNIT area representative or factory location.



**PRESSURE-SENSITIVE ADHESIVE**

ELASTOFOAM can be furnished with an acrylic pressure-sensitive adhesive applied to the mounting surface. Use of the pressure-sensitive adhesive is restricted to strips and gaskets having minimum cross-section width of .250 in. [6.35 mm]. Shelf life is one year from date of receipt when stored at or below room temperature (23°C).