
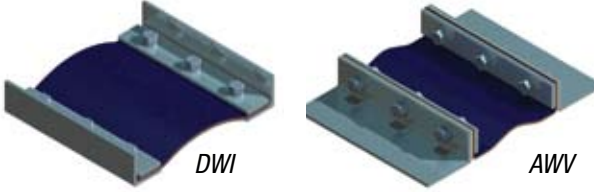
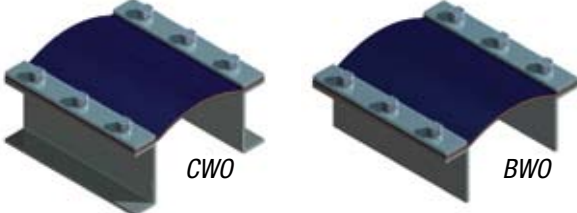
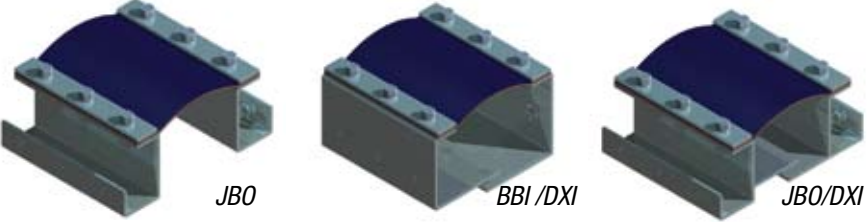
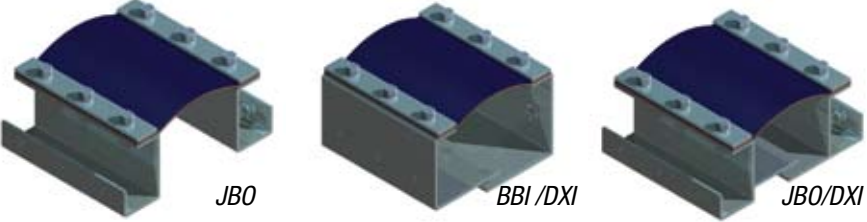


RM DYNEX Styles	Typical Frame Configurations*
Mark II E300E X275-X300	
Mark III E400V X404-X425	
Mark V Mod. C500-C1000 LX801-LX1001	
Mark V C800-C1000 LX801-LX1001	
1200GTA 1200GTB	

**Configurations representative only of typical designs. Frame configuration dependent upon many application variables. More options available. Consult RM DYNEX design engineers for recommended configuration based upon application parameters.*

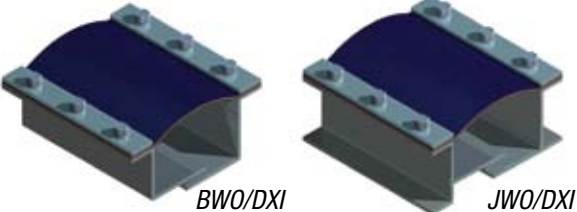